

# ZBD Schottky Detector SMA – BNC Interface (NB)

0.01 to 26.5 GHz


MODEL NO: EZM0126NB

PRODUCT FEATURE

- †No Bias Required
- †Negative (-) Polarity
- †Broadband Flat Frequency Response
- †Excellent VSWR


Max Input Power: +27 dBm Peak  
 +20 dBm CW  
 Operating Temperature: -54°C to +100°C  
 Storage Temperature: -65°C to +100°C

Specification @ 25°C & -20 dBm Input Power

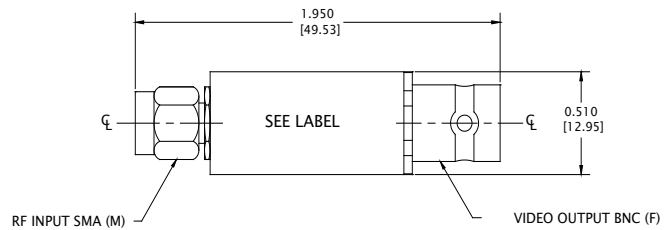

NOTE, UNLESS OTHERWISE SPECIFIED.

1. DIMENSIONS ARE IN INCHES[mm].
2. TOLERANCES: ±.020[0.51]
3. MATERIAL: PASSIVATED STAINLESS STEEL.



Parameters	SPECIFICATION				
	FREQ. (GHz)	MIN (dB)	TYPICAL (dB)	MAX (dB)	Units
Voltage Sensitivity	0.01 to 26.5	90	100	250	mV/mW Open Circuit
Voltage Sensitivity Stability over Temperature	0.01 to 26.5	2.5	3.0	3.5	dB
VSWR	0.01 to 18.0 18.0 – 26.5		1.5 2.0	1.6 2.2	
Flatness	0.01 to 18.0 18.0 – 26.5		±0.50 ±1.00	±0.55 ±1.15	dB
Polarity			Neg (-)		eV
Video Capacitance		420	470	500	pF
Dynamic Range	0.01 to 26.5	-30		+20	dBm

NOTES:

1. Negative output polarity is standard. Add P to the end of the model number for positive polarity, EZM0126PNB
2. Typical values are measured at +25°C and are not guaranteed

# ZBD Schottky Detector SMA – BNC Interface (NB)

0.01 to 26.5 GHz



MODEL NO: EZM0126NB

## Typical Performance @ 25°C

